

FEATURE
WALL

CONTEMPORARY DECORATIVE WALL PANELLING



FW1 Natural Oak

Feature Wall is a decorative real wood veneer wall panel which is lightweight, easy to cut and install, and available in two sizes. **The perfect solution for commercial or domestic use.**



EASY TO CUT



EASY TO INSTALL



HIDE UNTIDY CABLES




NOISE ABSORBING



CONCEALED PANEL JOINTS



TRANSFORM WALLS IN AN INSTANT



FW1 Natural Oak



FW2 Silver Oak



FW3 Charcoal Oak



FW3 Charcoal Oak



FW2 Silver Oak

SPECIFICATION


- Two panel sizes:
2400 x 600 x 22mm & 3000 x 600 x 22mm.
- Each slat measures 27mm, with a 13mm recess in between.
- Slats are made from black FSC® certified fire resistant MDF with a decorative real wood veneer.
- Noise absorbing due to density of black felt backing material.
- Acoustic felt backing used is Class B,s2, d0 Fire rated.
- 44 panels per pallet, individually packed.
- 1 year warranty against manufacturing defects.

INSTALLATION

Feature Wall panels are easy to fit with simple installation instructions included with each panel. Panels can be easily attached to the wall with either adhesive or black drywall screws, alternatively it can be attached to battens to provide space behind for secret cabling. Please ensure the panels are NOT installed in a damp environment.

Feature Wall panels can be installed either vertically or horizontally. Lightweight fixtures such as picture hanging can be installed through the felt backing of the panels to the substrate, please do not affix to the individual slats. For heavy fixtures, such as shelving and TV mounts, install the fixture first and cut and install the panels around it.

PANEL SIZES

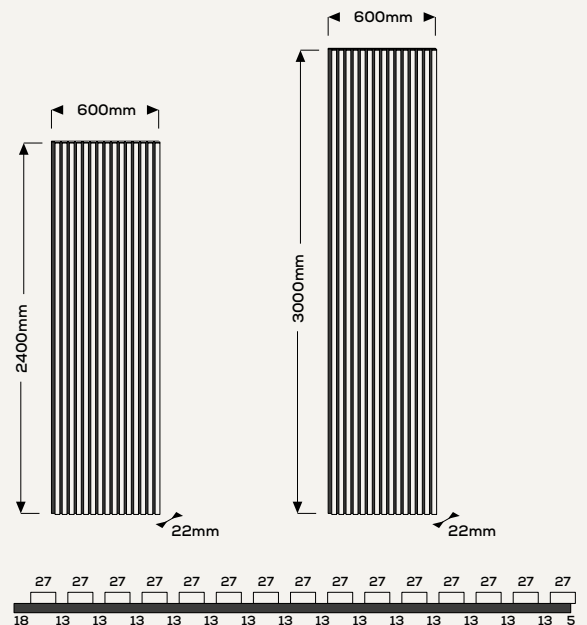

CARE & MAINTENANCE

To maintain Feature Wall panels occasionally wipe down the slats with a damp lint free cloth. In addition, the use of a brush attachment on a vacuum cleaner is ideal to clean the recesses in between the slats.

Once installed we recommend the use of a wood treatment product on the wood veneer slats, such as Bona Oil Refresher, to help protect and create an even finish. Note that this process will need to be repeated as required. Please ensure you trial a good quality product on an offcut before applying to your Feature Wall panels.



FW1 Natural Oak



FW3 Charcoal Oak



FW2 Silver Oak



info@feature-wall.co.uk

Disclaimer: Due to variations in the photographic and printing processes the colours shown may vary compared to the actual product. Please ensure the panels are NOT installed in a damp environment. Due to the use of natural veneers, the product, if left exposed for long periods of time may be subject to slight fading which is a process where any natural fibres are exposed to UV rays. We reserve the right to alter and amend product and technical details without prior notice.