

Clicwall

Immediate Decorative Wall Panelling




Seamless Wall System for the Shopfitting Industry



Introduction


Clicwall provides an immediate decorative wall system in a fraction of the time when compared to traditional methods, thanks to the patented inconspicuous joint system from Unilin.

Available ex-stock in 12 stylish designs including woodgrains and plain colours, there is also a paint-grade option which provides the perfect surface for painting, wallpapering, covering with textiles or printing with a bespoke image, pattern, message or design. Please contact us for further information about our digital print service.

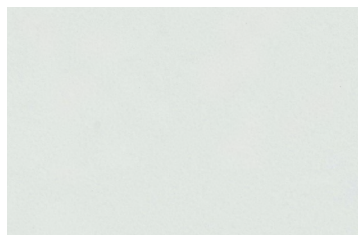


Front White

025-CST

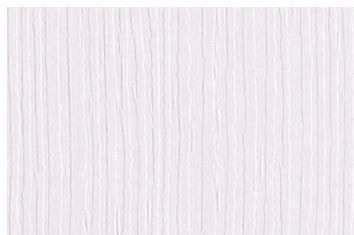


Front White

025-WO3

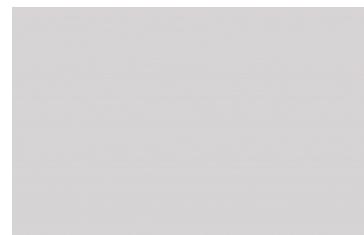


Silicon

625-CST



Seashell

U147-CST

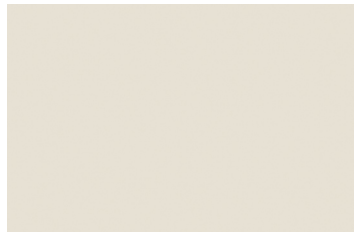

Dune Beige

U127-CST



Flakewood White

H163-BST



Pure Concrete Light

F989-BST




Heritage Oak Light Patina

H450-V9A



Royal Oak Vanille

H588-V8A

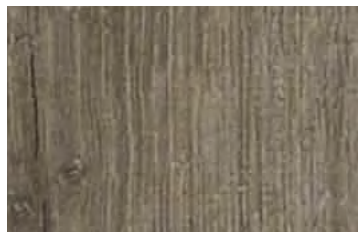


Robinson Oak Brown

H786-WO6



Robinson Oak Light Natural

H784-WO6

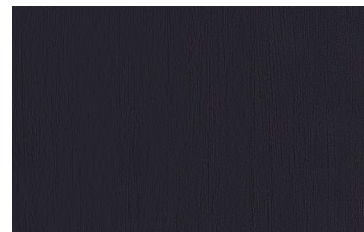

Elegant Black

I13-WO6

PLUS Paint 050-MAT paint grade for digital print, wallpaper or painting.

To order product samples or for any additional information, please contact our sales team on **0845 023 0376**, email **solutions@idsurfaces.co.uk** or visit **www.idsurfaces.co.uk**







Why choose Clicwall?

Clicwall is up to five times faster to install when compared with traditional plasterboard methods, saving on labour costs as well as time, and because it does not require additional finishing dust and dirt is kept to a minimum.











Clicwall v's Plasterboard


Clicwall

- Step 1. Erect substructure
 (metal or wooden substructure)
- Step 2. Mount Clicwall
 (6 to 7 fixing points per panel)

Plasterboard

- Step 1. Erect substructure
 (metal or wooden substructure)
- Step 2. Mount plasterboard
 (20 to 25 fixing points per panel)
- Step 3. Fill fixing holes and joints

- Step 4. Drying time

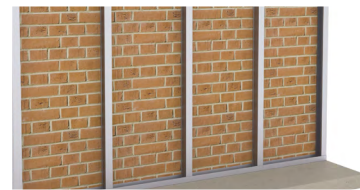- Step 5. Smooth/sand joints and holes

- Step 6. Apply primer coating

- Step 7. Drying time

- Step 8. Paint finishing colour
 (may require 2 coatings)
- Step 9. Drying time


Substructures



Metal substructures




Timber substructures

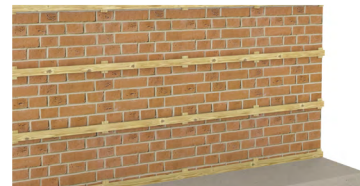


Timber battens straight onto wall

Cost

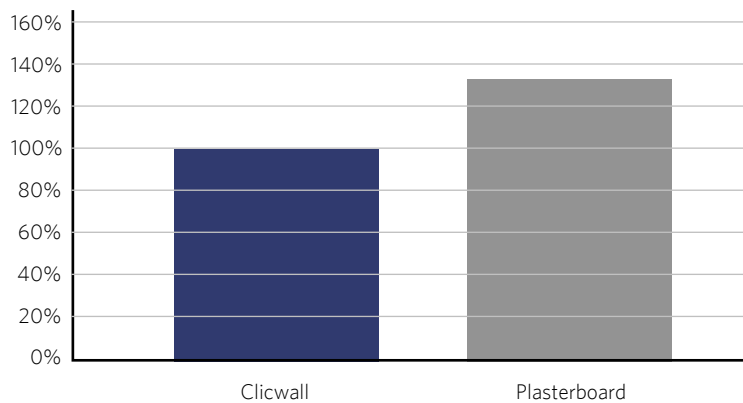

Clicwall = faster delivery of the project = less additional cost

Fixing Systems

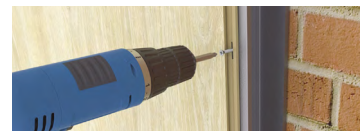

Screws



Staple



Glue with MS polymers




Fire resistance

When installed in accordance with the instructions below, Clicwall guarantees fire resistance of 60 and 30 minutes respectively.

Clicwall installation with fire resistance EI60


European certificate for non-bearing partition wall
- EN 1364-1:1999

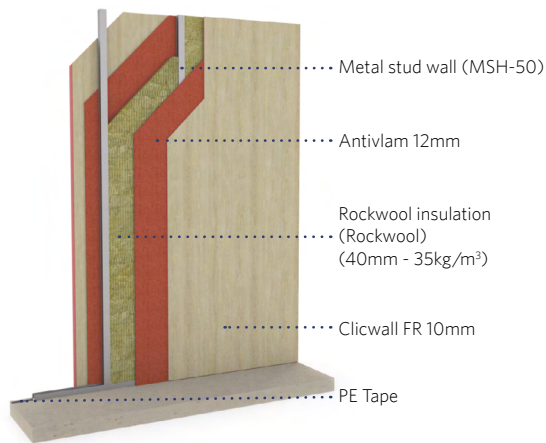

Antivlam against metal stud wall: wood screw 4.0 x 25
Clicwall FR on Antivlam: MS-polymer bonding

Clicwall installation with fire resistance EI30

European certificate for non-bearing partition wall
- EN 1364-1:2015

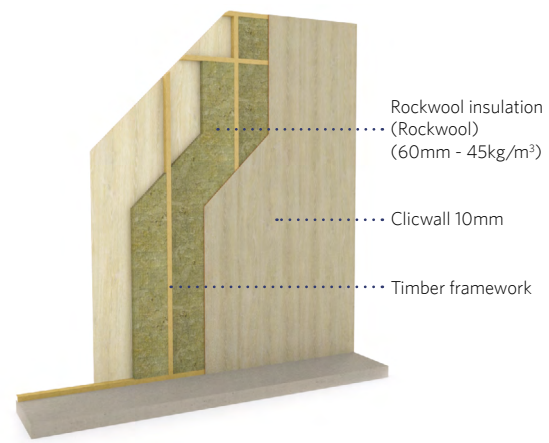


Clicwall against timber battens: wood screw 3.5 x 16

Acoustic comfort

In the EI60 set-up, Clicwall provides a very high acoustic comfort value of 48dB and thus readily achieves the most current sound-proofing requirements.

Accessories

Co-ordinating profiles and skirting boards ensure a perfect finish.

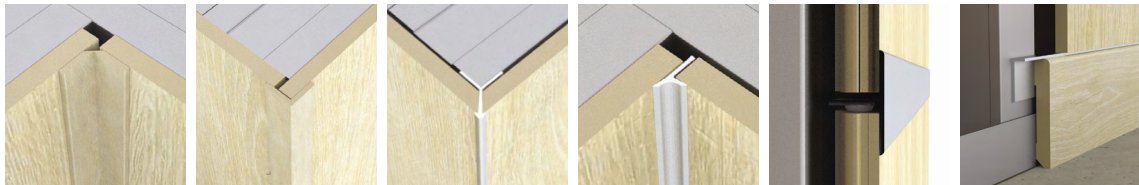

Flexible interior and external corner profile in a matching design: 2750 x 42 x 3mm

Matching skirting boards: 2400 x 80 x 12mm

Aluminium internal and external corner profile: 2785 mm

Aluminium T-profile: 3000 mm

Paintable skirting boards: 2400 x 160 x 16mm

For full construction information, please download a Clicwall brochure from www.idsurfaces.co.uk or contact our sales teams via **0845 023 0376** or solutions@idsurfaces.co.uk.

Technical Information

| | Clicwall |
|--------------------------------|--|
| Construction | Melamine faced MDF |
| Size | 2785 x 600 x 10mm (net size) 2785 x 618 x 10mm (gross size) |
| Min. order quantity | 1 pack (2 panels) |
| Environmental accreditation | PEFC™ |
| Available in additional decors | ✓ |

3500mm length panels and aluminium corners are available made to order with a minimum quantity order. Call your IDS specialist for more information.



View the Clicwall Installation Video on YouTube: <https://bit.ly/2AQ58jk>

Digitally Printed Clicwall

Our digital print service allows any design to be printed onto Clicwall panels **2500mm high x 600mm wide x 10mm thickness**. Patterns, company logos, images and more - the only limit is your imagination!



For further information
contact us on **0845 023 0376**,
email solutions@idsurfaces.co.uk
or visit www.idsurfaces.co.uk





BRANCH CONTACT DETAILS

Call your nearest
Panel Specialist
branch for expert
advice, samples and
literature on...

Tel: 0845 023 0376

Email: solutions@idsurfaces.co.uk

www.idsurfaces.co.uk



NORTH

Warrington*

T 01925 852200

F 01925 852999

E warringtonsales@idsurfaces.co.uk

SOUTH

Ely*

T 01353 645110

F 01353 645112

E elysales@idsurfaces.co.uk

Other Branches

Cardiff^

T 01443 842911

E cardiffsales@themakeovercentre.com

Chatham^

T 01634 666613

E chathamsales@themakeovercentre.com

Cheadle^

T 0161 485 3571

E cheadlesales@themakeovercentre.com

Croydon^

T 0203 96 71098

E croydonsales@themakeovercentre.com

Enfield^

T 0203 985 9324

E enfieldsales@themakeovercentre.com

Exeter

T 01392 824452

E exetersales@idsurfaces.co.uk

Gateshead

T 0191 491 7000

E gatesheadsales@idsurfaces.co.uk

Leeds

T 0113 220 3900

E leeds.sales@idsurfaces.co.uk

Norwich

T 01603 402133

E norwichsales@idsurfaces.co.uk

Nuneaton

T 02476 325031

E wmsesales@idsurfaces.co.uk

Rosyth

T 01383 421120

E rosythsales@idsurfaces.co.uk

Southampton

T 02380 698950

E southamptonsales@idsurfaces.co.uk

Stoke

T 01782 567222

E stokesales@idsurfaces.co.uk

Swindon

T 01793 513181

E swindonsales@idsurfaces.co.uk

Thurrock^

T 01708 252366

E thurrocksales@themakeovercentre.com

Woodford^

T 0208 550 8899

E woodfordsales@themakeovercentre.com